

## A KALMAN FILTER WITH INTERMITTENT OBSERVATIONS AND RECONSTRUCTION OF DATA LOSSES

TAOUBA RHOUMA <sup>a,\*</sup>, JEAN-YVES KELLER <sup>b</sup>, MOHAMED NACEUR ABDELKRIM <sup>a</sup>

<sup>a</sup>Laboratory of Modeling, Analysis and Control  
National Engineering School of Gabes  
University of Gabes  
Omar Ibn Khattab Street, 6029 Gabes, Tunisia  
e-mail: taouba.rhouma@gmail.com

<sup>b</sup>Henri Poincaré University Institute of Technology of Longwy  
University of Lorraine  
186 rue de Lorraine, 54400 Cosnes-et-Romain, France  
e-mail: jean-yves.keller@univ-lorraine.fr

This paper deals with the problem of joint state and unknown input estimation for stochastic discrete-time linear systems subject to intermittent unknown inputs on measurements. A Kalman filter approach is proposed for state prediction and intermittent unknown input reconstruction. The filter design is based on the minimization of the trace of the state estimation error covariance matrix under the constraint that the state prediction error is decoupled from active unknown inputs corrupting measurements at the current time. When the system is not strongly detectable, a sufficient stochastic stability condition on the mathematical expectation of the random state prediction errors covariance matrix is established in the case where the arrival binary sequences of unknown inputs follow independent random Bernoulli processes. When the intermittent unknown inputs on measurements represent intermittent observations, an illustrative example shows that the proposed filter corresponds to a Kalman filter with intermittent observations having the ability to generate a minimum variance unbiased prediction of measurement losses.

**Keywords:** Kalman filter, intermittent unknown inputs, linear system, intermittent observation.

### 1. Introduction

Since the Kalman filter (KF) was designed by Kalman (1960), it has become the basis of different systems theories (Nosrati and Shafiee, 2018; Ding and Fang, 2018; Tran *et al.*, 2021). It plays an essential role in many estimation processes in a wide range of applications (Simon, 2006; Kailath *et al.*, 2000; Sumithra and Vadivel, 2021).

The state filtering problem for discrete-time systems in the presence of persistent unknown inputs has drawn close attention. Friedland (1969) proposed the two-stage Kalman filter in which the state estimation and unknown input estimation are decoupled to reduce computation requirements of the augmented state filter (see Alouani *et al.*, 1992; Keller and Darouach, 1997; Hsieh and Chen,

1999; Ignagni, 2000; Kim *et al.*, 2006). When there is no prior information available about the unknown input, an optimal recursive state filter by Kitanidis (1987) can be applied so that the state estimation error is decoupled from unknown inputs. Another approach which consists in transforming a standard system with unknown inputs into a singular system without unknown inputs was introduced by Darouach *et al.* (1992). Other optimal filters closer to the standard Kalman filter were derived by minimizing the estimation error covariance matrix with respect to a reduced state feedback gain. This represents the degrees of freedom in the design of the unknown input Kalman filter (UIKF) as observed by Chen and Patton (1996), Darouach and Zasadzinski (1997), and Hou and Patton (1998).

There has been a considerable amount of interest in joint estimation of input and state by using the

---

\*Corresponding author

Kalman filter (Varshney *et al.*, 2019; Zhang and Ding, 2020). An unbiased minimum-variance filter to estimate the unknown input and the state for linear systems, when the state and input estimation are performed in two sequential and independent steps is proposed by Gillijns and De Moor (2007). Joint state and input estimation for linear discrete-time systems is of great practical importance for fault tolerant control (FTC) and fault diagnosis problems so that each component of the unknown inputs vector has been represented as actuator or component faults (Blanke *et al.*, 2006; Hmida *et al.*, 2010; Fang *et al.*, 2011).

In recent years, networks have attracted meticulous attention with the rapid development of network technologies and novel control strategies. Networked control systems (NCSs) have been used in many industrial fields such as electrical power systems, chemical industry, manufacturing industry, natural gas systems, etc. (Yuan *et al.*, 2017; Zhang *et al.*, 2017; Wang *et al.*, 2020). The NCS is an integration of actuators, sensors, and controllers that exchange data through a communication network. This may lead to packet losses, induced delays and end-to-end communication jitters. Hespanha *et al.* (2007) review several recent results on estimation, analysis, and controller synthesis for NCSs and design control systems that take into account of effects packet losses and packet delays.

Another frequently included problem is intermittent communication that may result from unreliable channels or a stochastic manner of data transmission. This may influence the performance of the NCS components. Sun and Ma (2014) explain how the measurements could be delayed or even lost due to transmission problems and signal fluctuations of the sensor and estimator communication channels. Therefore, the problem of intermittent observations must be carefully considered (Li *et al.*, 2015; Jie *et al.*, 2018).

We are mainly concerned in our work by packet losses that cause intermittent data transmission. Sinopoli *et al.* (2004) and Fletcher *et al.* (2004) studied the particular case when the Kalman filtering problem with a random loss of observations is represented by Markovian or Bernoulli processes. It was extended later to include both random delay (Schenato *et al.*, 2007; Shi *et al.*, 2009) and packet losses. Huang and Dey (2007) consider the case where the availability of observations is regulated by a Markov chain. More recently, Censi (2010) tackled the case when the arrival of observations is driven by a semi-Markov chain. Zhang *et al.* (2012) derive a suboptimal Kalman filter with intermittent observations by minimizing the mean squared estimation error and the mean square stability has been analyzed. The dual problem of state filtering with intermittent unknown inputs on state equation is studied by Keller and Sauter (2013). Instead of using the parameterized

approach proposed by Darouach and Zasadzinski (1997) which requires to pre-compute off-line the structure of the state feedback gain for each combinatorial situation of the binary sequence, the intermittent unknown input decoupling constraint was parameterized by two fixed-size matrices, called the free and constrained parts of the filter gain. The constrained gain structurally dependent on the binary sequence was linked to estimator of the intermittent unknown inputs. From a two-stage optimization strategy very similar to that described by Friedland (1969), the free and constrained gains were both used to minimize the trace of the state estimation error covariance matrix and the trace of the unknown input estimation error covariance matrix.

Besides several network-induced effects, NCSs become vulnerable to cyber physical attacks incorporating cyber and physical activities into a malicious attack that can lead to serious incidents. Recently, a sharp rise in the number of cyber attacks has been reported. Consequently, many researchers have shown a great concern for the analysis of vulnerabilities of NCSs to external attacks (Wang and Yang, 2019; Chang *et al.*, 2018; Chabir *et al.*, 2018).

Attackers can generate various types of cyber attacks. They can be categorized as deception attacks which compromise the authenticity of the sensors and actuators' data by injecting false data among them and DoS attacks which affect the availability of the data. A deception attack is generated by directly modifying the control or measurement signal. It is classified into four classes: false data injection attacks (Liang *et al.*, 2015), covert attacks (De Sá *et al.*, 2017), replay attacks (Zhu and Martinez, 2013) and stealthy attacks (Rhouma *et al.*, 2015; 2018; Dán and Sandberg, 2010). In turn, DoS attacks are introduced to corrupt the sensor measurement or the control command by affecting communication channels of NCSs. These malicious acts may cause time delays and packet dropouts as described by Huang *et al.* (2011) as well as Yuan and Sun (2015). Since DoS attacks require little prior knowledge on control systems, they are easy to apply and the study of NCSs under DoS attacks becomes of paramount importance.

Motivated by the aforementioned discussions, this paper is devoted to handle the issue of joint state and unknown input estimation for stochastic discrete-time linear systems subject to intermittent unknown inputs on measurements. We propose a Kalman filter approach for state prediction and intermittent unknown input reconstruction. The filter design is based on the minimization of the trace of the state estimation error covariance matrix under the constraint that the state prediction error is decoupled from active unknown inputs corrupting measurements at the current time. When the system is not strongly detectable, this work establishes a sufficient stochastic stability condition on the

mathematical expectation of the random state prediction errors covariance matrix when the arrival binary sequences of unknown inputs follow independent random Bernoulli processes. When the intermittent unknown inputs on measurements are used to represent intermittent observations, we show that the proposed filter coincides with a Kalman filter with intermittent observation having the ability the reconstruct measurement losses. We give an illustrative example which presents the state filtering results of the proposed Kalman filter for linear systems subject to DoS attacks and we show the ability of this strategy to reconstruct the measurement losses caused by these malicious acts.

The paper is organized as follows. Section 2 explains the problem of joint state and unknown input estimation with intermittent unknown inputs in measurement equation. Section 3 solves the state filtering problem and studies the stability of the stochastic filter. An illustrative example, applied to the case of DoS attacks, is given in Section 4 before conclusions in Section 5.

## 2. Problem formulation

Consider the following linear discrete-time stochastic systems:

$$x_{k+1} = Ax_k + Bu_k + w_k, \quad (1a)$$

$$y_k = Cx_k + Jd_k^\theta + v_k, \quad (1b)$$

where  $x_k \in \mathbb{R}^n$ ,  $u_k \in \mathbb{R}^d$ ,  $y_k \in \mathbb{R}^m$  and  $d_k^\theta \in \mathbb{R}^q$  are the state, control, measurement and unknown input vectors with  $q \leq m$ . Matrices  $A, B, C$  and  $J$  are of appropriate dimensions. The process and sensor noises  $w_k \in \mathbb{R}^n$  and  $v_k \in \mathbb{R}^m$  are zero mean uncorrelated Gaussian random sequences with

$$E \left\{ \begin{bmatrix} w_k \\ v_k \end{bmatrix} \begin{bmatrix} w_j \\ v_j \end{bmatrix}^T \right\} = \begin{bmatrix} W & 0 \\ 0 & I \end{bmatrix} \delta_{k,j}, \quad (2)$$

where  $W \geq 0$ .

The initial state  $x_0$ , assumed to be uncorrelated with  $w_k$  and  $v_k$ , is a Gaussian random variable with  $E\{x_0\} = \bar{x}_0$  and

$$P_0 = E\{(x_0 - \bar{x}_0)(x_0 - \bar{x}_0)^T\} \geq 0.$$

The vector of intermittent unknown inputs

$$d_k^\theta = [\rho_k^1 d_k^1 \quad \dots \quad \rho_k^i d_k^i \quad \dots \quad \rho_k^q d_k^q]^T \quad (3)$$

depends on the known binary variables

$$\theta_k = \{\rho_k^1, \dots, \rho_k^i, \dots, \rho_k^q\} \quad (4)$$

with  $\rho_k^i = 1$  when the  $i$ -th component  $\rho_k^i d_k^i$  of  $d_k^\theta$  is active; otherwise,  $\rho_k^i = 0$ . Here

$$s_k = \sum_{i=1}^q \rho_k^i$$

represents the number of active unknown inputs. We assume that  $\text{rank}(J) = q \leq m$  with  $J = [j^1 \quad \dots \quad j^i \quad \dots \quad j^q]$  where  $j^i$  is the unknown input distribution vector of  $d_k^i$ .

Consider the following linear state filter:

$$\hat{x}_{k+1/k}^\theta = A\hat{x}_{k/k}^\theta + Bu_k, \quad (5a)$$

$$P_{k+1/k}^\theta = AP_{k/k}^\theta A^T + W, \quad (5b)$$

$$\hat{x}_{k/k}^\theta = \hat{x}_{k/k-1}^\theta + K_k^\theta (y_k - C\hat{x}_{k/k-1}^\theta), \quad (5c)$$

$$P_{k/k}^\theta = (I - K_k^\theta C)P_{k/k-1}^\theta (I - K_k^\theta C)^T \quad (5d)$$

$$+ K_k^\theta K_k^{\theta T}, \quad (5e)$$

where  $\hat{x}_{k/k-1}^\theta$  is the state prediction with covariance matrix

$$P_{k/k-1}^\theta = E\{(x_k - \hat{x}_{k/k-1}^\theta)(x_k - \hat{x}_{k/k-1}^\theta)^T\}$$

based on measurements available until time  $k-1$  and  $\theta_{k-1}$  and where  $\hat{x}_{k/k}^\theta$  is the state estimate with covariance matrix

$$P_{k/k}^\theta = E\{(x_k - \hat{x}_{k/k}^\theta)(x_k - \hat{x}_{k/k}^\theta)^T\}$$

based on measurements available until time  $k$  and  $\theta_k$ . From (1) and (5), the state prediction error  $e_{k+1/k}^\theta = x_{k+1} - \hat{x}_{k+1/k}^\theta$  and the state estimation error  $e_{k/k}^\theta = x_k - \hat{x}_{k/k}^\theta$  propagate as

$$e_{k+1/k}^\theta = Ae_{k/k}^\theta + w_k, \quad (6a)$$

$$e_{k/k}^\theta = (I - K_k^\theta C)e_{k/k-1}^\theta - K_k^\theta v_k \quad (6b)$$

$$- K_k^\theta Jd_k^\theta. \quad (6c)$$

Under  $E\{e_{k/k-1}^\theta\} = 0$ , we have  $E\{e_{k/k}^\theta\} = -K_k^\theta Jd_k^\theta = 0$  and thus  $E\{e_{k+1/k}^\theta\} = 0$  if and only if the state feedback gain  $K_k^\theta \in \mathbb{R}^{n,m}$  satisfies the unknown input decoupling constraint  $K_k^\theta Jd_k^\theta = 0$  so that it can be equivalently rewritten under (3) as

$$K_k^\theta J_k^\theta = 0 \quad (7)$$

with  $J_k^\theta = [\rho_k^1 j^1 \quad \dots \quad \rho_k^i j^i \quad \dots \quad \rho_k^q j^q]$ . Instead of parameterizing the solution  $K_k^\theta = L_k^\theta \Sigma_k^\theta$  to (7) as in the work of Darouach and Zasadzinski (1997) by one parameter  $L_k^\theta \in \mathbb{R}^{n,m-s_k}$ , with  $\Sigma_k^\theta = \alpha_k(I - J_k^\theta (J_k^\theta)^+)$  and  $\alpha_k \in \mathbb{R}^{m-s_k,m}$  so that  $\text{rank}(\Sigma_k^\theta) = m - s_k$ , which requires pre-computing  $\alpha_k$  for each combinatorial situation of the binary sequence  $\theta_k$ , this

paper parameterizes the solution  $K_k^\theta = K_k^0 + \mu_k^\theta G_k^\theta$  to (7) as done by Keller and Sauter (2013) by two free parameters  $K_k^0 \in \mathbb{R}^{n,m}$  and  $G_k^\theta \in \mathbb{R}^{q,m}$ , where  $\mu_k^\theta = -K_k^0 J_k^\theta$  can be easily computed on-line. The unknown input decoupling constraint (7) can then be rewritten as

$$(K_k^0 + \mu_k^\theta G_k^\theta) J_k^\theta = 0 \quad (8)$$

or

$$\mu_k^\theta G_k^\theta J_k^\theta = \mu_k^\theta. \quad (9)$$

From (9), we deduce that the state feedback gain (8) satisfies (7)  $\forall \theta_k$  and  $\forall K_k^0$  if and only if  $G_k^\theta$  satisfies

$$G_k^\theta J_k^\theta = I_k^\theta \quad (10)$$

with  $I_k^\theta = \text{diag}[\rho_k^1 \quad \rho_k^i \quad \rho_k^q]$  since  $\mu_k^\theta I_k^\theta = \mu_k^\theta$ ,  $\forall \theta_k$  and  $\forall K_k^0$ . The necessary and sufficient existence condition

$$\text{rank}\left(\begin{bmatrix} J_k^\theta \\ I_k^\theta \end{bmatrix}\right) = \text{rank}(J_k^\theta), \quad \forall \theta_k$$

for a solution to (10) is given by  $\text{rank}(J) = q$ . Suggested by the structure of the state feedback gain (8), let us define

$$\hat{d}_{k/k}^\theta = G_k^\theta (y_k - C \hat{x}_{k/k-1}^\theta), \quad (11a)$$

$$Q_{k/k}^\theta = E \left\{ (\hat{d}_{k/k}^\theta - d_{k/k}^\theta)(\hat{d}_{k/k}^\theta - d_{k/k}^\theta)^T \right\}, \quad (11b)$$

where  $E\{\hat{d}_{k/k}^\theta\} = G_k^\theta J_k^\theta d_k^\theta = d_k^\theta$  under (7) and (10). The state estimator (5) and the intermittent unknown input estimator (11) will be designed by minimizing the trace of  $P_{k/k}^\theta$  and  $Q_{k/k}^\theta$  with respect to  $K_k^\theta$  and  $G_k^\theta$  under (7) and (10).

### 3. Kalman filter with intermittent unknown inputs on measurements

In this section we shall solve the problem of joint state and unknown inputs estimation, presented in Section 2, by designing a Kalman filter with intermittent unknown inputs to measurements.

**Theorem 1.** *The unbiased minimum variance (UMV) state estimate is generated by the following modified Kalman filter:*

$$\begin{aligned} \hat{x}_{k/k}^\theta &= (I - K_k^0 C) \hat{x}_{k/k-1}^\theta + K_k^0 y_k \\ &\quad + \mu_k^\theta \hat{d}_{k/k}^\theta, \end{aligned} \quad (12a)$$

$$\begin{aligned} P_{k/k}^\theta &= (I - K_k^0 C) P_{k/k-1}^\theta (I - K_k^0 C)^T \\ &\quad + K_k^0 K_k^{0T} + \mu_k^\theta Q_{k/k}^\theta \mu_k^{\theta T}, \end{aligned} \quad (12b)$$

$$K_k^0 = P_{k/k-1}^\theta C^T (C P_{k/k-1}^\theta C^T + I)^{-1}, \quad (12c)$$

$$\hat{x}_{k+1/k}^\theta = A \hat{x}_{k/k}^\theta + B u_k, \quad (12d)$$

$$P_{k+1/k}^\theta = A P_{k/k}^\theta A^T + W. \quad (12e)$$

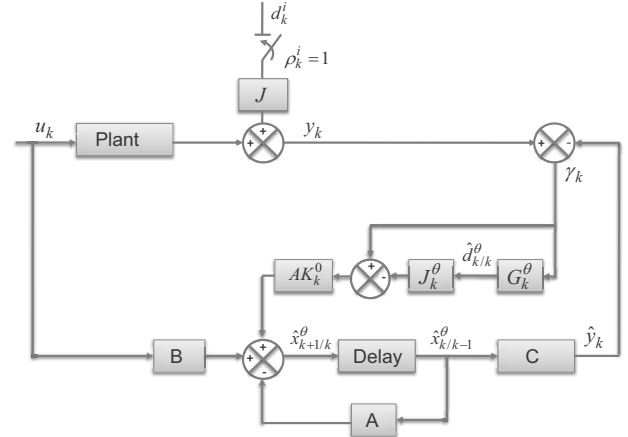


Fig. 1. Generation of  $\hat{x}_{k+1/k}^\theta$  and  $\hat{d}_{k/k}^\theta$  by additive correction of the standard Kalman filter.

At the estimation step, the additive quantities  $\mu_k^\theta \hat{d}_{k/k}^\theta$  and  $\mu_k^\theta Q_{k/k}^\theta \mu_k^{\theta T}$  depend on the unknown input estimate  $\hat{d}_{k/k}^\theta$  with covariance  $Q_{k/k}^\theta$  given by

$$\hat{d}_{k/k}^\theta = G_k^\theta (y_k - C \hat{x}_{k/k-1}^\theta), \quad (13a)$$

$$Q_{k/k}^\theta = [J_k^{\theta T} (C P_{k/k-1}^\theta C^T + I)^{-1} J_k^\theta]^+ \quad (13b)$$

with  $G_k^\theta = Q_{k/k}^\theta J_k^{\theta T} (C P_{k/k-1}^\theta C^T + I)^{-1}$ . The  $i$ -th component  $\hat{d}_{k/k}^{\theta i}$  of  $\hat{d}_{k/k}^\theta$  represents the estimate of  $\rho_k^i d_k^i$  (with  $\hat{d}_{k/k}^{\theta i} = 0$  when  $\rho_k^i = 0$ ). On the other hand, the  $i$ -th component  $Q_{k/k}^{\theta i}$  on the diagonal part of  $Q_{k/k}^\theta$  represents the variance of  $\hat{d}_{k/k}^{\theta i}$  (with  $Q_{k/k}^{\theta i} = 0$  when  $\rho_k^i = 0$ ). The intermittent unknown input Kalman filter with unknown inputs to measurements (IIKFM) is initialized by  $\hat{x}_{0/-1}^\theta = \bar{x}_0$  and  $P_{0/-1}^\theta = P_0 \geq 0$ .

Figure 1 illustrates the generation concept of the estimates of  $\hat{x}_{k+1/k}^\theta$  and  $\hat{d}_{k/k}^\theta$  by using an additive correction of the standard Kalman filter.

*Proof.* We assume that

$$X_k^\theta = [x_k^T \quad d_k^{\theta T}]^T,$$

$$\hat{X}_{k/k}^\theta = [\hat{x}_{k/k}^{\theta T} \quad \hat{d}_{k/k}^{\theta T}]^T,$$

$$\Omega_{k/k}^\theta = E \left\{ \begin{bmatrix} e_{k/k}^\theta \\ \varepsilon_{k/k}^\theta \end{bmatrix} \begin{bmatrix} e_{k/k}^\theta \\ \varepsilon_{k/k}^\theta \end{bmatrix}^T \right\}$$

$$L_k^\theta = [K_k^{\theta T} \quad G_k^{\theta T}]^T.$$

The state estimator (5) and the unknown input estimator (11) can then be jointly expressed as

$$\hat{X}_{k/k}^\theta = \begin{bmatrix} I \\ 0 \end{bmatrix} \hat{x}_{k/k-1}^\theta + L_k^\theta (y_k - C \hat{x}_{k/k-1}^\theta), \quad (14a)$$

$$\Omega_{k/k}^\theta = \left( \begin{bmatrix} I \\ 0 \end{bmatrix} - L_k^\theta C \right) P_{k/k-1}^\theta \left( \begin{bmatrix} I \\ 0 \end{bmatrix} - L_k^\theta C \right)^T + L_k^\theta L_k^{\theta T}, \quad (14b)$$

$$\hat{x}_{k+1/k}^\theta = [A \ 0] \hat{X}_{k/k}^\theta + B u_k, \quad (14c)$$

$$P_{k+1/k}^\theta = [A \ 0] \Omega_{k/k}^\theta [A \ 0]^T + W. \quad (14d)$$

When  $\text{tr}(P_{k/k-1}^\theta)$  attains a minimum,  $\hat{X}_{k/k}^\theta$  is the UMV estimate of  $X_k^\theta$  (and thus  $\text{tr}(P_{k+1/k}^\theta)$  is minimum) if and only if the augmented gain  $L_k^\theta = [K_k^{\theta T} \ G_k^{\theta T}]^T$  is a solution to

$$\min_{L_k^\theta} \text{tr}(\Omega_{k/k}^\theta)$$

subject to

$$L_k^\theta J_k^\theta = \begin{bmatrix} 0 \\ I_k^\theta \end{bmatrix}. \quad (15)$$

The solution of (15) is difficult to obtain since  $K_k^\theta$  depends on  $G_k^\theta$  through  $K_k^\theta = K_k^0 + \mu_k^\theta G_k^\theta$ . Assume that  $\bar{X}_k^\theta = T_k X_k^\theta$ ,  $\bar{\hat{X}}_{k/k}^\theta = T_k \hat{X}_{k/k}^\theta$ ,  $\bar{\Omega}_{k/k}^\theta = T_k \Omega_{k/k}^\theta T_k^T$  and  $\bar{L}_k^\theta = T_k L_k^\theta$ . The matrix  $T_k$  is an arbitrary non-singular transformation matrix of appropriate dimensions. The filter (14) can then be equivalently rewritten as

$$\bar{\hat{X}}_{k/k}^\theta = T_k \begin{bmatrix} I \\ 0 \end{bmatrix} \hat{x}_{k/k-1}^\theta + \bar{L}_k^\theta (y_k - C \hat{x}_{k/k-1}^\theta), \quad (16a)$$

$$\bar{\Omega}_{k/k}^\theta = (T_k \begin{bmatrix} I \\ 0 \end{bmatrix} - \bar{L}_k^\theta C) P_{k/k-1}^\theta (T_k \begin{bmatrix} I \\ 0 \end{bmatrix} - \bar{L}_k^\theta C)^T + \bar{L}_k^\theta \bar{L}_k^{\theta T}, \quad (16b)$$

$$\hat{x}_{k+1/k}^\theta = [A \ 0] T_k^{-1} \bar{\hat{X}}_{k/k}^\theta + B u_k, \quad (16c)$$

$$P_{k+1/k}^\theta = [A \ 0] T_k^{-1} \bar{\Omega}_{k/k}^\theta T_k^{-T} [A \ 0]^T + W. \quad (16d)$$

Once  $\text{tr}(P_{k/k-1}^\theta)$  attains its minimum,  $\bar{\hat{X}}_{k/k}^\theta$  is the UMV estimate of  $\bar{X}_k^\theta$  (and thus  $\text{tr}(P_{k+1/k}^\theta)$  minimum) if and only if the transformed gain  $\bar{L}_k^\theta$  is a solution to

$$\min_{\bar{L}_k^\theta} \text{tr}(\bar{\Omega}_{k/k}^\theta)$$

subject to

$$\bar{L}_k^\theta J_k^\theta = T_k \begin{bmatrix} 0 \\ I_k^\theta \end{bmatrix}. \quad (17)$$

With

$$T_k = \begin{bmatrix} I & -\mu_k^\theta \\ 0 & I \end{bmatrix}$$

determined so that

$$\bar{L}_k^\theta = T_k [K_k^{\theta T} \ G_k^{\theta T}]^T = [K_k^{0T} \ G_k^{\theta T}]^T,$$

where  $K_k^0$  is now decoupled from  $G_k^\theta$ , we can also verify that the transformed algebraic constraints in (17) reduce to  $G_k^\theta J_k^\theta = I_k^\theta$ .

After straightforward manipulations, (17) becomes

$$\min_{\substack{K_k^0 \\ G_k^\theta}} \text{tr}(\bar{\Omega}_{k/k}^\theta) \quad (18)$$

subject to

$$G_k^\theta J_k^\theta = I_k^\theta$$

with

$$\bar{\Omega}_{k/k}^\theta = \begin{bmatrix} P_{k/k}^{0\theta} & \Omega_{12} \\ \Omega_{21} & Q_{k/k}^\theta \end{bmatrix}, \quad (19)$$

where

$$\Omega_{12} = [P_{k/k-1}^\theta C^T - K_k^0 (C P_{k/k-1}^\theta C^T + I)] G_k^{\theta T},$$

$$\Omega_{21} = G_k^\theta [P_{k/k-1}^\theta C^T - K_k^0 (C P_{k/k-1}^\theta C^T + I)]^T.$$

We have

$$P_{k/k}^{0\theta} = (I - K_k^0 C) P_{k/k-1}^\theta (I - K_k^0 C)^T + K_k^0 K_k^{0T}, \quad (20a)$$

$$Q_{k/k}^\theta = G_k^\theta H_k G_k^{\theta T}. \quad (20b)$$

with  $H_k = C P_{k/k-1}^\theta C^T + I$ .

From  $\text{tr}(\bar{\Omega}_{k/k}^\theta) = \text{tr}(P_{k/k}^{0\theta}) + \text{tr}(Q_{k/k}^\theta)$  which is deduced from (19), we can conclude that the global solution to (18) coincides with the local solutions of the following decoupled optimization problems:

$$\min_{K_k^0} \text{tr}(P_{k/k}^{0\theta}) \quad (21)$$

with

$$\min_{G_k^\theta} \text{tr}(Q_{k/k}^\theta) \quad (22)$$

subject to

$$G_k^\theta J_k^{\theta i} = I_k^{\theta i} \quad \text{for } i = 1, \dots, q,$$

where  $J_k^{\theta i}$  and  $I_k^{\theta i}$  represent the  $i$ -th columns of  $J_k^\theta$  and  $I_k^\theta$ .

The unique solution to (21) coincides with the Kalman filter gain

$$K_k^0 = P_{k/k-1}^\theta C^T (C P_{k/k-1}^\theta C^T + I)^{-1}.$$

The existence of the  $i$ -th constraint in (22) is conditioned by  $\rho_k^i = 1$ . The solution to (22) can then be derived by minimizing

$$\Phi_k^\theta = \frac{1}{2} \text{tr}(G_k^\theta H_k G_k^{\theta T}) + \sum_{i=1}^q \lambda_k^{\theta i T} (G_k^\theta J_k^{\theta i} - I_k^{\theta i}), \quad (23)$$

where  $\lambda_k^{\theta i} \in \mathbb{R}^{q,1}$  is the Lagrange multiplier vector satisfying  $\lambda_k^{\theta i} = 0$  when  $\rho_k^i = 0$  and  $\lambda_k^{\theta i} \neq 0$  when  $\rho_k^i = 1$ . The optimality conditions for  $\Phi_k^\theta$  are

$$\frac{\partial \Phi_k^\theta}{\partial G_k^\theta} = G_k^\theta H_k + \sum_{i=1}^q \lambda_k^{\theta i} (J_k^{\theta i})^T = 0, \quad (24a)$$

$$\frac{\partial \Phi_k^\theta}{\partial \lambda_k^i} = G_k^\theta J_k^{\theta i} - I_k^{\theta i} = 0 \quad \text{if } \rho_k^i = 1, \quad \forall i = 1, \dots, q. \quad (24b)$$

The solution

$$G_k^\theta = - \left\{ \sum_{i=1}^q \lambda_k^{\theta i} J_k^{\theta i T} \right\} H_k^{-1}$$

to (24a) substituted in (24b) gives

$$- \lambda_k^{\theta} J_k^{\theta T} H_k^{-1} J_k^\theta = I_k^\theta, \quad (25)$$

where  $\lambda_k^\theta = [\lambda_k^{\theta 1} \quad \lambda_k^{\theta i} \quad \lambda_k^{\theta q}] \in \mathbb{R}^{q,q}$  represents the Lagrange multiplier matrix. The solution to (25) expressed as  $\lambda_k^\theta = -I_k^\theta [J_k^{\theta T} H_k^{-1} J_k^\theta]^+ = [J_k^{\theta T} H_k^{-1} J_k^\theta]^+$  from  $J_k^\theta I_k^\theta = J_k^\theta$  and substituted in  $G_k^\theta = -\lambda_k^\theta J_k^{\theta T} H_k^{-1}$  gives

$$G_k^\theta = [J_k^{\theta T} H_k^{-1} J_k^\theta]^+ J_k^{\theta T} H_k^{-1} \quad (26)$$

leading to  $Q_{k/k}^\theta = G_k^\theta H_k G_k^{\theta T} = [J_k^{\theta T} H_k^{-1} J_k^\theta]^+$  via  $X^+ X X^+ = X^+$  ( $X^+$  is the unique Moore-Penrose generalized inverse of  $X$ ). The optimal gain  $K_k^0$  substituted in (19) yields the covariance

$$\bar{\Omega}_{k/k}^\theta = \text{diag} \begin{bmatrix} P_{k/k}^0 & Q_{k/k}^\theta \end{bmatrix}$$

of

$$\hat{X}_{k/k}^\theta = \begin{bmatrix} \hat{x}_{k/k}^{0T} & \hat{d}_{k/k}^{\theta T} \end{bmatrix}^T$$

where  $\hat{x}_{k/k}^0 = (I - K_k^0 C) \hat{x}_{k/k-1}^0 + K_k^0 y_k$  derives from (16a). The optimized filter (16) recovers the IIKFM of Theorem 1 via

$$T_k^{-1} = \begin{bmatrix} I & \mu_k^\theta \\ 0 & I \end{bmatrix}$$

in (16c). ■

We are now going to study the stochastic stability conditions of the IIKFM.

From  $\Sigma_k^\theta = \alpha_k (I - J_k^\theta (J_k^\theta)^+)$ , where  $\alpha_k$  is a matrix of dimension  $(m - s_k, m)$  so that  $\text{rank}(\Sigma_k^\theta) = m - s_k$ , the system (1) can be transformed into a free intermittent unknown input system

$$x_{k+1} = A x_k + B u_k + w_k, \quad (27a)$$

$$y_k^\theta = C_k^\theta x_k + v_k^\theta. \quad (27b)$$

with  $y_k^\theta = \Sigma_k^\theta y_k \in \mathbb{R}^{m-s_k}$ ,  $C_k^\theta = \Sigma_k^\theta C \in \mathbb{R}^{m-s_k, n}$  and  $v_k^\theta = \Sigma_k^\theta v_k \in \mathbb{R}^{m-s_k}$ .

When designed for (27), the time-varying Kalman filter

$$\hat{x}_{k+1/k}^\theta = (A - L_k^\theta C_k^\theta) \hat{x}_{k/k-1}^\theta + L_k^\theta y_k^\theta, \quad (28a)$$

$$P_{k+1/k}^\theta = (A - L_k^\theta C_k^\theta) P_{k/k-1}^\theta (A - L_k^\theta C_k^\theta)^T + L_k^\theta V_k^\theta L_k^{\theta T} + W, \quad (28b)$$

with  $L_k^\theta = A P_{k/k-1}^\theta C_k^{\theta T} (C_k^\theta P_{k/k-1}^\theta C_k^{\theta T} + V_k^\theta)^{-1} \in \mathbb{R}^{n, m-s_k}$ , where  $V_k^\theta = \Sigma_k^\theta \Sigma_k^{\theta T} > 0$ ,  $\forall \theta_k = \{\rho_k^1, \dots, \rho_k^i, \dots, \rho_k^q\}$  recovers the state prediction and covariance given by the IIKFM of Theorem 1.

When the arrival binary sequence of unknown inputs follows independent random Bernoulli processes with  $\lambda = \Pr[\rho_k^i = 1] \in [0, 1]$  for  $i \in \{1, \dots, q\}$ , let  $\lambda_c$  be the critical arrival rate so that

$$\lim_{k \rightarrow \infty} E \{ P_{k+1/k}^\theta \} < \infty$$

when  $\lambda \leq \lambda_c$  and

$$\lim_{k \rightarrow \infty} E \{ P_{k+1/k}^\theta \} \rightarrow \infty$$

when  $\lambda > \lambda_c$ . We denote by  $E\{P_{k+1/k}^\theta\}$  the mathematical expectation of the random covariance  $P_{k+1/k}^\theta$  taken with respect to  $\{\theta_i\}_0^k$  and  $\lambda_c$  is the critical unknown input occurrence rate. The sufficient conditions under which

$$\lim_{k \rightarrow \infty} E \{ P_{k+1/k}^\theta \} < \infty, \quad \forall \lambda \in [0, \hat{\lambda}_c]$$

will be established with  $\hat{\lambda}_c$  as the lower bound of  $\lambda_c$ .

Define

$$\vartheta = \{\theta_0, \theta_1, \dots, \theta_{N-2}, \theta_{N-1}\}$$

as the set of  $N = 2^q$  different binary situations of

$$\theta_k = \{\rho_k^1, \dots, \rho_k^i, \dots, \rho_k^q\}$$

described by

$$\theta_0 = \{0, 0, \dots, 0, 0\},$$

$$\theta_1 = \{1, 0, 0, 0, 0\},$$

$$\vdots,$$

$$\theta_{N-2} = \{1, 1, 0, 1, 0\},$$

$$\theta_{N-1} = \{1, 1, \dots, 1, 1\}.$$

Let

$$\sigma_k = \{\sigma_k^0, \dots, \sigma_k^j, \dots, \sigma_k^{N-1}\}$$

be the set of binary variables defined by  $\sigma_k^j = 1$  when  $\theta_k = \theta_j$  or  $\sigma_k^j = 0$  when  $\theta_k \neq \theta_j$ .

**Theorem 2.** If there exist  $L_j \in \mathbb{R}^{n, m-r_j}$  for  $j \in \{0, \dots, N-1\}$  and  $Y \in \mathbb{R}^{n, n}$  with  $0 < Y \leq I$  such that

$$\Psi_\lambda(Y, L_0, L_1, \dots, L_{N-1}) > 0 \quad (29)$$

with

$$\Psi_\lambda(Y, L_0, L_1, \dots, L_{N-1}) = \begin{bmatrix} Y & \sqrt{p_0}\Omega_0 & \sqrt{p_1}\Omega_1 \\ \sqrt{p_0}\Omega_0^T & Y & 0 \\ \sqrt{p_1}\Omega_1^T & 0 & Y \\ \vdots & \vdots & \vdots \\ \sqrt{p_{N-1}}\Omega_{N-1}^T & 0 & 0 \\ \dots & \sqrt{p_{N-1}}\Omega_{N-1} \\ \dots & 0 \\ \dots & 0 \\ \vdots & \vdots \\ \dots & Y \end{bmatrix},$$

$\Omega_j = YA + L_j C_j$ , so that  $C_j$  is the value of  $C_k^\theta$  when  $\sigma_k^j = 1$  and  $p_j = \lambda^{r_j} (1 - \lambda)^{q-r_j}$ , where  $r_j$  is the number of ones in  $\theta_j$ , then

$$\lim_{k \rightarrow \infty} E \{P_{k/k-1}^\theta\} < \infty \quad \forall \lambda \in [0, \hat{\Delta}_c] \quad (30)$$

with  $\hat{\Delta}_c$  as the solution to the LMI feasibility problem

$$\hat{\Delta}_c = \arg \left\{ \max_{\lambda} \Psi_\lambda(Y, L_0, L_1, \dots, L_{N-1}) > 0 \right\}.$$

If the system under permanent unknown inputs is strongly detectable with

$$\text{rank} \begin{bmatrix} -Iz + A & 0 \\ C & J \end{bmatrix} = n + q, \quad \forall |z| \geq 1, \quad (31)$$

then

$$\lim_{k \rightarrow \infty} E \{P_{k/k-1}^\theta\} < \infty, \quad \forall \lambda \in [0, 1].$$

*Proof.* Relation (28b) can be expressed as a switching standard Riccati difference equation (RDE)

$$P_{k+1/k}^\theta = \sum_{j=0}^{N-1} \sigma_k^j f_j(P_{k/k-1}^\theta), \quad (32)$$

where  $f_j(X)$  is the Riccati operator that can be defined as follows:

$$f_j(X) = AXA^T + W - AXC_j^T (C_j X C_j^T + V_j)^{-1} C_j X A^T \quad (33)$$

and  $V_j$  is the value of  $V_k^\theta$  when  $\sigma_k^j = 1$ . The mathematical expectation  $E\{P_{k+1/k}^\theta\}$  of the random covariance  $P_{k+1/k}^\theta$  can then be expressed as

$$E \{P_{k+1/k}^\theta\} = \sum_{j=0}^{N-1} p_j E \{f_j(P_{k/k-1}^\theta)\}. \quad (34)$$

The Riccati operator  $f_j(X)$  is concave and increasing with  $X$ . Jensen's inequality gives

$$E \{P_{k+1/k}^\theta\} \leq \sum_{j=0}^{N-1} p_j f_j(E \{P_{k/k-1}^\theta\})$$

and the deterministic upper bounded  $S_{k+1}$  of  $E\{P_{k+1/k}^\theta\}$  so that  $E\{P_{k+1/k}^\theta\} \leq S_{k+1}$  is generated by the following modified RDE:

$$S_{k+1} = \sum_{j=0}^{N-1} p_j f_j(S_k), \quad (35)$$

with  $S_0 = P_0 \geq 0$ .

Define

$$S = \sum_{j=0}^{N-1} p_j f_j(S)$$

as the modified algebraic Riccati difference equation (ARDE) associated with the modified RDE (35). Theorem 2 directly yields the stochastic stability of the Kalman filter with intermittent observations. For a given  $\lambda$ , there exists  $S \geq 0$ , a solution to  $S = g_\lambda(S)$  so that

$$\lim_{k \rightarrow \infty} E \{P_{k/k-1}^\theta\} \leq S < \infty$$

if there exists  $L_j \in \mathbb{R}^{n, m-r_j}$  for  $j \in \{0, 1, \dots, N-1\}$  and  $0 < Y \leq I$  so that  $\Psi_\lambda(Y, L_0, \dots, L_{N-1}) > 0$ . The solution to the LMI feasibility problem

$$\hat{\Delta}_c = \arg \left\{ \max_{\lambda} \Psi_\lambda(Y, L_0, L_1, \dots, L_{N-1}) > 0 \right\}$$

gives the lower bound  $\hat{\Delta}_c$  of  $\lambda_c$  (Sinopoli *et al.*, 2004). In the permanent unknown inputs case, when  $\lambda = 1$ , the modified ARDE

$$S = \sum_{j=0}^{N-1} p_j f_j(S)$$

can be rewritten as a standard ARDE,

$$S_{k+1} = AS_k A^T + W - AS_k C_{N-1}^T (C_{N-1} S_k C_{N-1}^T + V_{N-1})^{-1} \times C_{N-1} S_k A^T, \quad (36)$$

with  $C_{N-1} = \Sigma_{N-1} C \in \mathbb{R}^{m-q, m}$  and  $V_{N-1} = \Sigma_{N-1} \Sigma_{N-1}^T \in \mathbb{R}^{m-q, m-q}$  where  $\alpha \in \mathbb{R}^{m-q, m}$  in

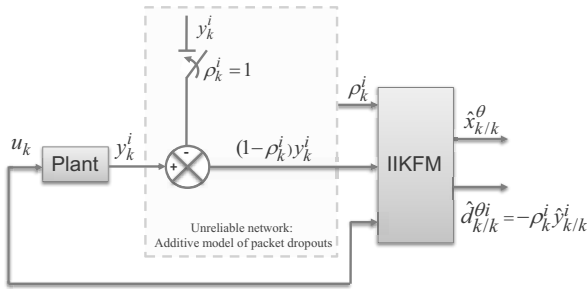


Fig. 2. IIKFM used as a KF with intermittent observations and data losses reconstruction.

$\Sigma_{N-1} = \alpha(I - JJ^+)$  is so that  $\text{rank}(\Sigma_{N-1}) = m - q$ . Under (31), the pair  $(A, C_{N-1})$  is detectable and there exists a strong solution to the ARDE (36) (all the modes of  $A - L_{N-1}C_{N-1}$  with  $L_{N-1} = ASC_{N-1}^T(C_{N-1}SC_{N-1}^T + V_{N-1})^{-1} \in \mathbb{R}^{n, m-q}$  are inside or on the unique circle). When  $q = m$ , the results given in this theorem remain valid with  $C_{N-1} = 0$  and  $L_{N-1} = 0$ .  $\blacksquare$

With  $J = I$ ,  $d_k = -y_k$  and the known binary variables in  $\theta_k$  generated by communication protocols (TCP) (see, e.g., Sinopoli *et al.*, 2004), the IIKFM of Theorem 1 can be viewed as a Kalman filter with intermittent observation based on data losses reconstruction as explained in Fig. 2.

Compared with the Kalman filter with intermittent observation (28a) and (28b) which needs time-varying size matrices  $C_k^\theta$  and  $V_k^\theta$  computed for the  $2^q$  binary situation of  $\theta_k$  with  $q = m$ , the IIKFM which is computationally more efficient just updates its fixed structure from the binary sequence  $\theta_k$ .

#### 4. Illustrative example

In this section we illustrate the feasibility and effectiveness of our proposed Kalman filtering approach for state prediction and data losses reconstruction via a numerical example applied to the case of denial-of-service attacks on measurements. We assume the following matrix parameters for the linear stochastic discrete-time system (1):

$$A = \begin{bmatrix} 0.4 & 1 & 0 & 0 \\ 0 & 0.3 & 1 & 0 \\ 0 & 0 & 1.3 & 0 \\ 0 & 0 & 0 & 0.8 \end{bmatrix},$$

$$B = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix},$$

$$C = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix},$$

$$W = 0.01 \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

and  $J = \begin{bmatrix} j^1 & j^2 & j^3 \end{bmatrix}$ , where

$$j^1 = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix}$$

is the fault distribution vector of the intermittent unknown input  $\rho_k^1 d_k^1$  affecting the first measurement,

$$j^2 = \begin{bmatrix} 0 \\ 1 \\ 0 \end{bmatrix}$$

the fault distribution vector of the intermittent unknown input  $\rho_k^2 d_k^2$  affecting the second measurement, and

$$j^3 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

the fault distribution vector of the intermittent unknown input  $\rho_k^3 d_k^3$  affecting the third measurement.

The plant  $(A, C, J)$  with  $J = I$  and  $A$  unstable cannot be strongly detectable, which means that any unknown input observers or unknown input Kalman filters designed under permanent unknown inputs will become unstable. We use here the IIKFM of Theorem 1 as a Kalman filter with intermittent observations, where the first measurement  $y_k^1$  is lost on unreliable communication channels with  $y_k^1 = 0$  when  $\rho_k^1 = 1$ , where the second measurement  $y_k^2$  is lost with  $y_k^2 = 0$  when  $\rho_k^2 = 1$  and where the third measurement  $y_k^3$  is lost with  $y_k^3 = 0$  when  $\rho_k^3 = 1$ . The binary sequence  $\theta_k = \{ \rho_k^1 \ \rho_k^2 \ \rho_k^3 \}$  is known and assumed to follow independent random Bernoulli processes with  $\lambda = \Pr(\rho_k^1 = 1) = \Pr(\rho_k^2 = 1) = \Pr(\rho_k^3 = 1)$ .

The stabilizing controller is of the LQG type, where the standard Kalman filter is replaced by the IIKFM of Theorem 1. In order to use the IIKFM as a Kalman filter with intermittent observations caused, e.g., by random DoS attacks on measurements transmitted by the plant to the controller, its design model is modified so that  $\rho_k^1 d_k^1$ ,  $\rho_k^2 d_k^2$  and  $\rho_k^3 d_k^3$  with  $d_k^1 = -y_k^1$ ,  $d_k^2 = -y_k^2$  and  $d_k^3 = -y_k^3$  represent intermittent measurement losses. The IIKFM can then be viewed as a special structure of the Kalman filter with intermittent observation allowing measurement losses reconstruction.

Figures 3–14 illustrate the obtained results when the rate  $\lambda = 0.5$  of DoS attacks is less than the lower bound

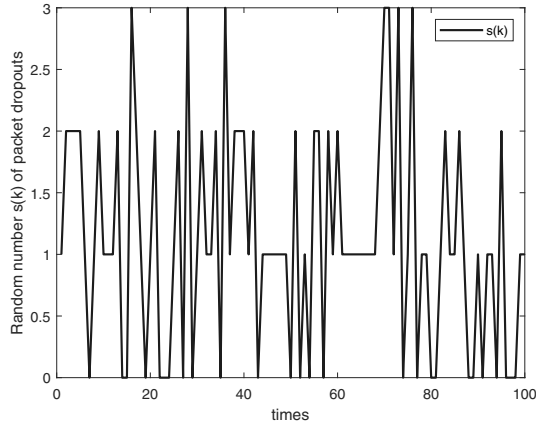


Fig. 3. Number  $s(k) = \rho_k^1 + \rho_k^2 + \rho_k^3$  of DoS attacks on received measurements.

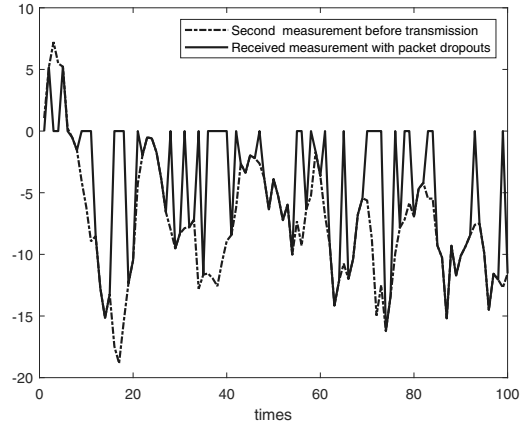


Fig. 5. Second information about measurement before transmission and after reception.

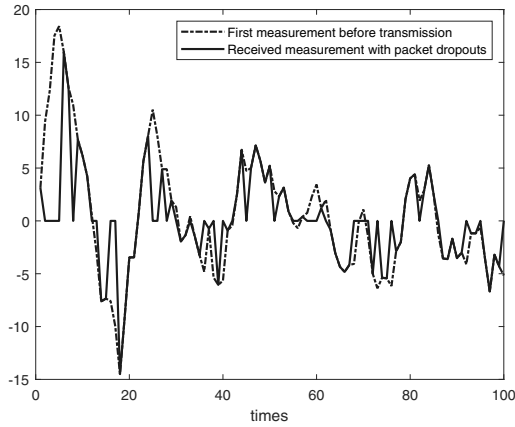


Fig. 4. First information about measurement before transmission and after reception.

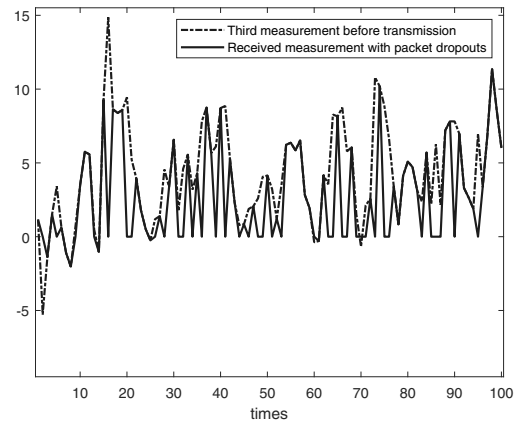


Fig. 6. Third information about measurement before transmission and after reception.

$\hat{\Delta}_c = 0,66$  of  $\lambda_c$  generated by the LMI of Theorem 2. The random numbers of denial-of-service attacks are plotted in Fig. 3.

The measurements transmitted from the plant to the LQG controller via communication networks are plotted in Figs. 4–6, respectively. Information about measurements received by the LQG controller is also plotted in the same figures. Figures 7–10 present the state filtering results of the IIKFM. Figures 11–13 show the ability of the proposed filter to reconstruct the measurement losses caused by DoS attacks. Figure 14 shows that the trace of the IIKFM's state prediction error covariance matrix coincides with those given by the Kalman filter with intermittent observation.

## 5. Conclusion

This paper has presented a Kalman filter for joint state prediction and unknown input estimation in linear stochastic discrete-time stochastic systems subject to intermittent unknown inputs to measurements. The presented linear state filter works in closed loop with a hybrid unknown input estimation and has the ability to recover the standard Kalman filter when the unknown inputs are zero. This fundamental structural property has been exploited to derive a Kalman filter with intermittent observations allowing intermittent reconstruction of measurement losses. When the system is not strongly detectable, we have established a necessary condition under which the mathematical expectation of the random state prediction errors covariance matrix is upper bounded when the arrival binary sequences of unknown inputs

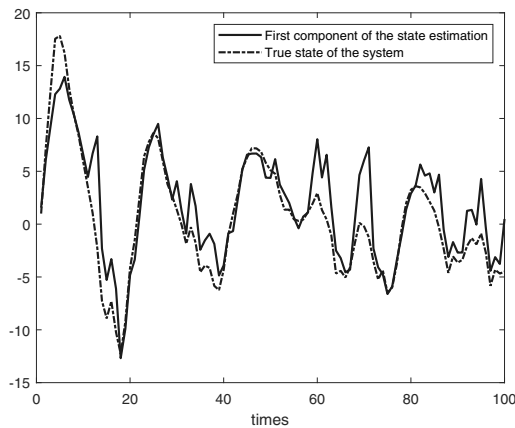


Fig. 7. First state of the plant  $x_k^1$  and its estimate  $\hat{x}_{k/k}^{\theta 1}$  generated by the IIKFM.

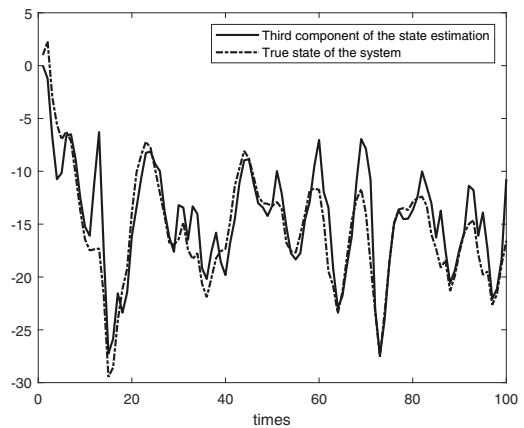


Fig. 9. Third state of the plant  $x_k^3$  and its estimate  $\hat{x}_{k/k}^{\theta 3}$  generated by the IIKFM.

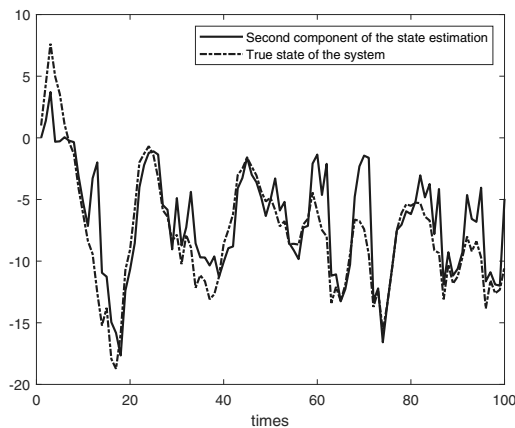


Fig. 8. Second state of the plant  $x_k^2$  and its estimate  $\hat{x}_{k/k}^{\theta 2}$  generated by the IIKFM.

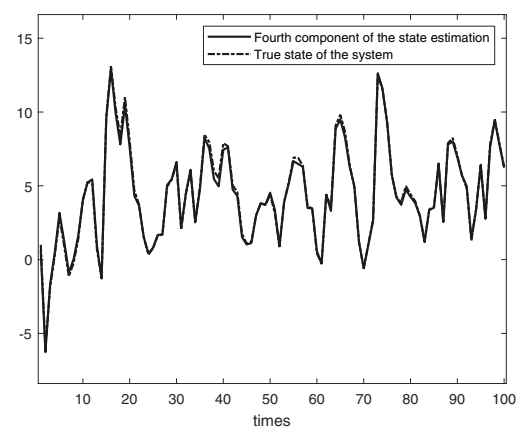
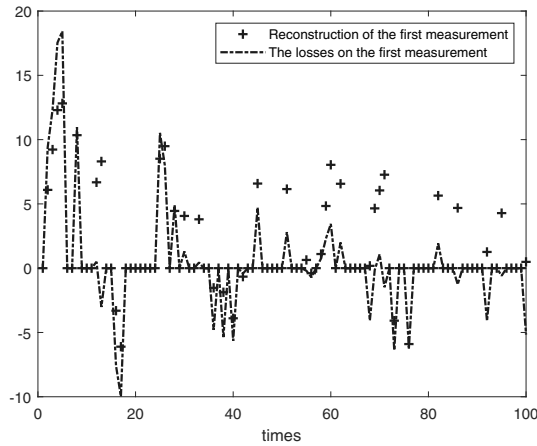
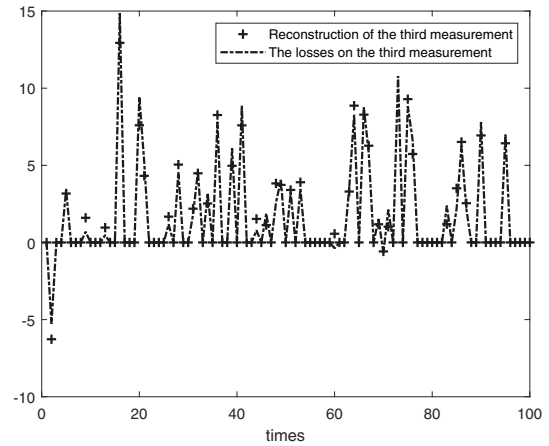
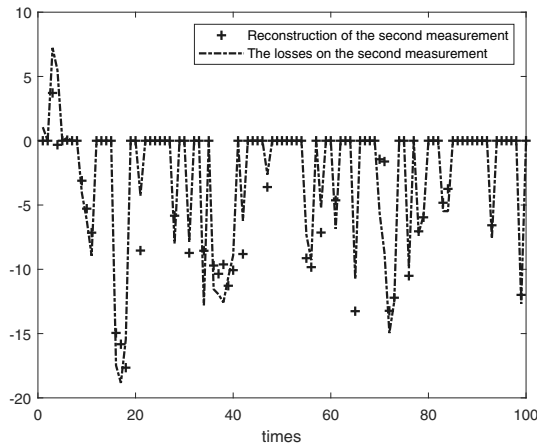
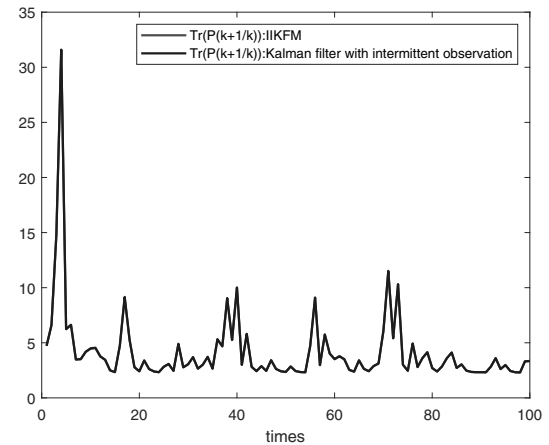


Fig. 10. Fourth state of the plant  $x_k^4$  and its estimate  $\hat{x}_{k/k}^{\theta 4}$  generated by the IIKFM.

follow independent random Bernoulli processes.

## References

- Alouani, A., Rice, T. and Blair, W. (1992). A two-stage filter for state estimation in the presence of dynamical stochastic bias, *American Control Conference, Chicago, USA*, pp. 1784–1788.
- Blanke, M., Kinnaert, M., Lunze, J., Staroswiecki, M. and Schröder, J. (2006). *Diagnosis and Fault-Tolerant Control*, Vol. 2, Springer, Berlin.
- Censi, A. (2010). Kalman filtering with intermittent observations: Convergence for semi-Markov chains and an intrinsic performance measure, *IEEE Transactions on Automatic Control* **56**(2): 376–381.
- Chabir, K., Rhouma, T., Keller, J.Y. and Sauter, D. (2018). State filtering for networked control systems subject to switching disturbances, *International Journal of Applied Mathematics and Computer Science* **28**(3): 473–482, DOI: 10.2478/amcs-2018-0036.
- Chang, Y. H., Hu, Q. and Tomlin, C.J. (2018). Secure estimation based Kalman filter for cyber-physical systems against sensor attacks, *Automatica* **95**(14): 399–412.
- Chen, J. and Patton, R.J. (1996). Optimal filtering and robust fault diagnosis of stochastic systems with unknown disturbances, *IEE Proceedings—Control Theory and Applications* **143**(1): 31–36.
- Dán, G. and Sandberg, H. (2010). Stealth attacks and protection schemes for state estimators in power systems, *1st IEEE International Conference on Smart Grid Communications, Gaithersburg, USA*, pp. 214–219.
- Darouach, M. and Zasadzinski, M. (1997). Unbiased minimum variance estimation for systems with unknown exogenous inputs, *Automatica* **33**(4): 717–719.
- Darouach, M., Zasadzinski, M. and Keller, J.Y. (1992). State estimation for discrete systems with unknown inputs using state estimation of singular systems, *American Control Conference, Chicago, USA*, pp. 3014–3015.

Fig. 11. Reconstruction of  $y_k^1$  when  $\rho_k^1 = 1$ .Fig. 13. Reconstruction of  $y_k^3$  when  $\rho_k^3 = 1$ .Fig. 12. Reconstruction of  $y_k^2$  when  $\rho_k^2 = 1$ .Fig. 14. Evolution of  $\text{tr}(P_{k+1/k}^\theta)$  given by the IIKFM and  $\text{tr}(P_{k+1/k})$  given by the Kalman filter with intermittent observation.

De Sá, A.O., da Costa Carmo, L.F.R. and Machado, R.C. (2017). Covert attacks in cyber-physical control systems, *IEEE Transactions on Industrial Informatics* **13**(4): 1641–1651.

Ding, B. and Fang, H. (2018). Fault estimation and prediction for nonlinear stochastic system with intermittent observations, *International Journal of Robust and Nonlinear Control* **28**(4): 1165–1181.

Fang, H., Shi, Y. and Yi, J. (2011). On stable simultaneous input and state estimation for discrete-time linear systems, *International Journal of Adaptive Control and Signal Processing* **25**(8): 671–686.

Fletcher, A.K., Rangan, S. and Goyal, V.K. (2004). Estimation from lossy sensor data: Jump linear modeling and Kalman filtering, *3rd International Symposium on Information Processing in Sensor Networks, Berkeley, USA*, pp. 251–258.

Friedland, B. (1969). Treatment of bias in recursive filtering, *IEEE Transactions on Automatic Control* **14**(4): 359–367.

Gillijns, S. and De Moor, B. (2007). Unbiased minimum-variance input and state estimation for linear

discrete-time systems with direct feedthrough, *Automatica* **43**(5): 934–937.

Hespanha, J.P., Naghshtabrizi, P. and Xu, Y. (2007). A survey of recent results in networked control systems, *Proceedings of the IEEE* **95**(1): 138–162.

Hmida, F.B., Khemiri, K., Ragot, J. and Gossa, M. (2010). Robust filtering for state and fault estimation of linear stochastic systems with unknown disturbance, *Mathematical Problems in Engineering* **2010**, Article ID: 591639.

Hou, M. and Patton, R.J. (1998). Optimal filtering for systems with unknown inputs, *IEEE Transactions on Automatic Control* **43**(3): 445–449.

Hsieh, C.-S. and Chen, F.-C. (1999). Optimal solution of the two-stage Kalman estimator, *IEEE Transactions on Automatic Control* **44**(1): 194–199.

Huang, H., Ahmed, N. and Karthik, P. (2011). On a new type of denial of service attack in wireless networks: The

- distributed jammer network, *IEEE Transactions on Wireless Communications* **10**(7): 2316–2324.
- Huang, M. and Dey, S. (2007). Stability of Kalman filtering with Markovian packet losses, *Automatica* **43**(4): 598–607.
- Ignagni, M. (2000). Optimal and suboptimal separate-bias Kalman estimators for a stochastic bias, *IEEE Transactions on Automatic Control* **45**(3): 547–551.
- Jie, S., Guoqing, Q., Yinya, L. and Andong, S. (2018). Stochastic convergence analysis of cubature Kalman filter with intermittent observations, *Journal of Systems Engineering and Electronics* **29**(4): 823–833.
- Kailath, T., Sayed, A.H. and Hassibi, B. (2000). *Linear Estimation*, Prentice Hall, Englewood Cliffs.
- Kalman, R.E. (1960). A new approach to linear filtering and prediction problems, *ASME Journal of Basic Engineering* **82**(1): 23–45.
- Keller, J.Y. and Darouach, M. (1997). Optimal two-stage Kalman filter in the presence of random bias, *Automatica* **33**(9): 1745–1748.
- Keller, J.Y. and Sauter, D. (2013). Kalman filter for discrete-time stochastic linear systems subject to intermittent unknown inputs, *IEEE Transactions on Automatic Control* **58**(7): 1882–1887.
- Kim, K.H., Lee, J.G. and Park, C.G. (2006). Adaptive two-stage kalman filter in the presence of unknown random bias, *International Journal of Adaptive Control and Signal Processing* **20**(7): 305–319.
- Kitanidis, P.K. (1987). Unbiased minimum-variance linear state estimation, *Automatica* **23**(6): 775–778.
- Li, W., Jia, Y. and Du, J. (2015). Distributed Kalman consensus filter with intermittent observations, *Journal of the Franklin Institute* **352**(9): 3764–3781.
- Liang, J., Sankar, L. and Kosut, O. (2015). Vulnerability analysis and consequences of false data injection attack on power system state estimation, *IEEE Transactions on Power Systems* **31**(5): 3864–3872.
- Nosrati, K. and Shafiee, M. (2018). Kalman filtering for discrete-time linear fractional-order singular systems, *IET Control Theory & Applications* **12**(9): 1254–1266.
- Rhouma, T., Chabir, K. and Abdelkrim, M.N. (2018). Resilient control for networked control systems subject to cyber/physical attacks, *International Journal of Automation and Computing* **15**(3): 345–354.
- Rhouma, T., Keller, J.Y., Sauter, D., Chabir, K. and Abdelkrim, M. (2015). Active GLR detector for resilient LQG controller in networked control systems, *IFAC-PapersOnLine* **48**(21): 754–759.
- Schenato, L., Sinopoli, B., Franceschetti, M., Poolla, K. and Sastry, S.S. (2007). Foundations of control and estimation over lossy networks, *Proceedings of the IEEE* **95**(1): 163–187.
- Shi, L., Xie, L. and Murray, R.M. (2009). Kalman filtering over a packet-delaying network: A probabilistic approach, *Automatica* **45**(9): 2134–2140.
- Simon, D. (2006). *Optimal State Estimation: Kalman,  $H_\infty$ , and Nonlinear Approaches*, Wiley, Hoboken.
- Sinopoli, B., Schenato, L., Franceschetti, M., Poolla, K., Jordan, M.I. and Sastry, S.S. (2004). Kalman filtering with intermittent observations, *IEEE Transactions on Automatic Control* **49**(9): 1453–1464.
- Sumithra, S. and Vadivel, R. (2021). An optimal innovation based adaptive estimation Kalman filter for accurate positioning in a vehicular ad-hoc network, *International Journal of Applied Mathematics and Computer Science* **31**(1): 45–57, DOI: 10.34768/amcs-2021-0004.
- Sun, S. and Ma, J. (2014). Linear estimation for networked control systems with random transmission delays and packet dropouts, *Information Sciences* **269**(2014): 349–365.
- Tran, T.A., Jauberthie, C., Travé-Massuyès, L. and Lu, Q.H. (2021). An interval Kalman filter enhanced by lowering the covariance matrix upper bound, *International Journal of Applied Mathematics and Computer Science* **31**(2): 259–269, DOI: 10.34768/amcs-2021-0018.
- Varshney, D., Bhushan, M. and Patwardhan, S.C. (2019). State and parameter estimation using extended Kitanidis Kalman filter, *Journal of Process Control* **76**(2019): 98–111.
- Wang, H., Tan, S., Zhu, Y. and Li, M. (2020). Deterministic scheduling with optimization of average transmission delays in industrial wireless sensor networks, *IEEE Access* **8**: 18852–18862.
- Wang, Q. and Yang, H. (2019). A survey on the recent development of securing the networked control systems, *Systems Science & Control Engineering* **7**(1): 54–64.
- Yuan, Y. and Sun, F. (2015). Data fusion-based resilient control system under DoS attacks: A game theoretic approach, *International Journal of Control, Automation and Systems* **13**(3): 513–520.
- Yuan, Y., Wang, Z. and Guo, L. (2017). Event-triggered strategy design for discrete-time nonlinear quadratic games with disturbance compensations: The noncooperative case, *IEEE Transactions on Systems, Man, and Cybernetics: Systems* **48**(11): 1885–1896.
- Zhang, D., Shi, P., Wang, Q.-G. and Yu, L. (2017). Analysis and synthesis of networked control systems: A survey of recent advances and challenges, *ISA Transactions* **66**(1): 376–392.
- Zhang, H., Song, X. and Shi, L. (2012). Convergence and mean square stability of suboptimal estimator for systems with measurement packet dropping, *IEEE Transactions on Automatic Control* **57**(5): 1248–1253.
- Zhang, X. and Ding, F. (2020). Adaptive parameter estimation for a general dynamical system with unknown states, *International Journal of Robust and Nonlinear Control* **30**(4): 1351–1372.
- Zhu, M. and Martinez, S. (2013). On the performance analysis of resilient networked control systems under replay attacks, *IEEE Transactions on Automatic Control* **59**(3): 804–808.

**Taouba Rhouma** was born in Chenini, Tunisia, in 1989. She received her MS degree in electrical and control engineering in 2013 from the National Engineering School of Gabès. She then obtained her PhD degree in electrical engineering in 2018. Her research works have been carried out at the Research Center for Automatic Control of Nancy (CRAN) and at the Research Laboratory of Modeling, Analysis and Control Systems of the National Engineering School of Gabès. Her main interests are in fault detection and diagnosis of networked control systems. She is now an assistant professor in electrical engineering at the Faculty of Sciences of Gabès.

**Jean-Yves Keller** received his PhD degree in automatic control from the University of Nancy, France, in 1991. Since 1993, he has been teaching as an associate professor at the Henri Poincaré University Institute of Technology (IUT de Longwy). He obtained his habilitation from Henri Poincaré University, Nancy, in 2003. His main interests include state filtering, fault diagnosis and fault tolerant control for networked controlled systems.

**Mohamed Naceur Abdelkrim** was born in 1958 in Metouia, Tunisia. He received his BS degree in electrical construction in 1980 and his MS degree in 1981 from the High Normal School of Technical Education of Tunis. He also obtained a PhD degree in automatic control in 2003 from the National School of Engineering of Tunis. He began teaching in 1981 at the National School of Engineer of Tunis, and since 2003 he has been a professor of automatic control at the National School of Engineering of Gabès. He is currently the head of the Laboratory of Modeling, Analysis and Control of Systems (MACS).

Received: 29 December 2021

Revised: 21 March 2022

Accepted: 9 April 2022